




## Flared & Dished

### Specifications

**Inside Dish Radius:** ????????

**Typical Thin Out Allowance:** 1/2" and under – Add .03125" to the minimum  
Over 1/2" - Add .0625" to the minimum

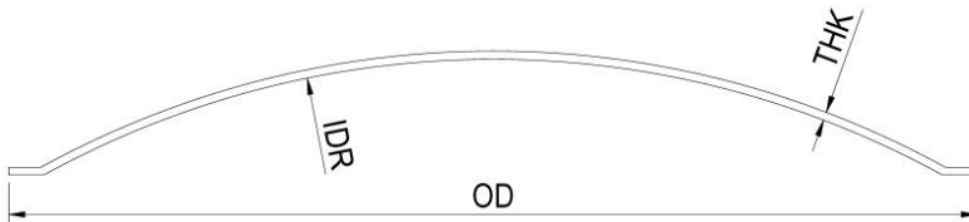

**IDR:** Inside Dish Radius  
**THK:** Thickness  
**OD:** Outside Diameter

### Capabilities

Diameter	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-3/8"	1-1/2"	1-3/4"
12	•	•										
18	•	•	•	•	•							
24	•	•	•	•	•							
40	•	•	•	•	•	•						
48	•	•	•	•	•	•	•	•				
60	•	•	•	•	•	•	•	•				
72	•	•	•	•	•	•	•	•				
84	•	•	•	•	•	•	•	•	•	•	•	•
96	•	•	•	•	•	•	•	•	•	•	•	•
108	•	•	•	•	•	•	•	•	•	•	•	•
120	•	•	•	•	•	•	•	•	•	•	•	•
132	•	•	•	•	•	•	•	•	•	•	•	•
144	•	•	•	•	•	•	•	•	•	•	•	•
156		•	•	•	•	•	•	•	•	•	•	•
168		•	•	•	•	•	•	•	•	•	•	•
180		•	•	•	•	•	•	•	•	•	•	•
192		•	•	•	•	•	•	•	•	•	•	
216			•	•	•	•	•	•	•	•	•	
240			•	•	•	•	•	•	•	•	•	
288			•	•	•	•	•	•	•	•	•	

Heads over 288" can be fabricated as segmented heads. Heads over 1½" on application. Parameters are given as reference only. Please contact a sales representative for specific inquiries. Other sizes and thicknesses, including light gauge jacket heads, are available upon application.