




Hemispherical

Specifications

Inside Dish Radius: 50% of diameter
Typical Thin Out Allowance: 1/2" and under – Add .03125" to the minimum
 Over 1/2" – Add .0625" to the minimum

All Hemispherical heads are offered as segmental construction.

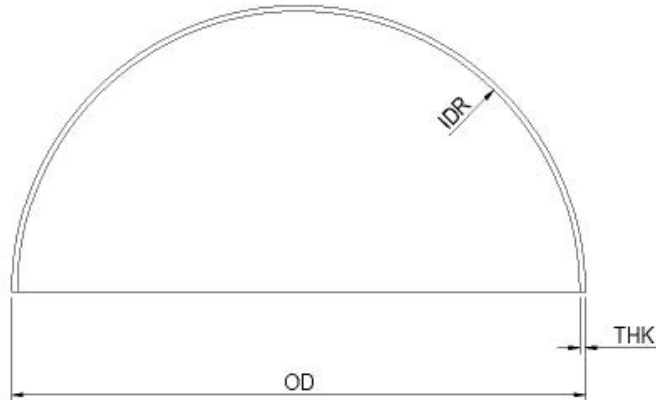

IDR: Inside Dish Radius
THK: Thickness
OD: Outside Diameter

Capabilities

Diameter	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-3/8"	1-1/2"	1-3/4"	2"
18	●	●	●	●	●								
24	●	●	●	●	●								
40	●	●	●	●	●	●							
48	●	●	●	●	●	●	●	●					
60	●	●	●	●	●	●	●	●	●	●	●	●	●
72	●	●	●	●	●	●	●	●	●	●	●	●	●
84	●	●	●	●	●	●	●	●	●	●	●	●	●
96	●	●	●	●	●	●	●	●	●	●	●	●	●
120		●	●	●	●	●	●	●	●	●	●	●	●
144		●	●	●	●	●	●	●	●	●	●	●	●
156			●	●	●	●	●	●	●	●	●	●	●
168			●	●	●	●	●	●	●	●	●	●	●
192			●	●	●	●	●	●	●	●	●	●	●
216			●	●	●	●	●	●	●	●	●	●	●
228			●	●	●	●	●	●	●	●	●	●	●
240			●	●	●	●	●	●	●	●	●	●	●
Unlimited			●	●	●	●	●	●	●	●	●	●	●

Parameters are given as reference only.

Please contact a sales representative for specific inquiries. Other sizes and thicknesses, including light gauge jacket heads, are available upon application.