




Reverse Flanged & Dished

Specifications

Inside Dish Radius: ????

Inside Knuckle Radius: ????

Typical Thin Out Allowance: 1/2" and under – Add .03125" to the minimum
Over 1/2" – Add .0625" to the minimum

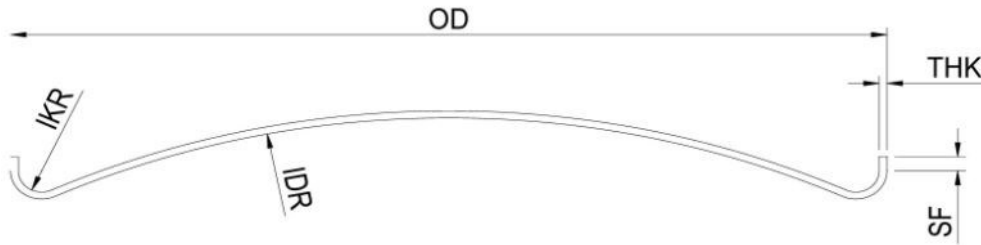

IKR: Inside Knuckle Radius
IDR: Inside Dish Radius
THK: Thickness
OD: Outside Diameter
SF: Straight Flange

Capabilities

Diameter	3/16"	1/4"	5/16"	3/8"	1/2"
12	•	•			
18	•	•	•	•	•
24	•	•	•	•	•
40	•	•	•	•	•
48	•	•	•	•	•
60	•	•	•	•	•
72	•	•	•	•	•
84	•	•	•	•	•
96	•	•	•	•	•
108	•	•	•	•	•
120	•	•	•	•	•
132	•	•	•	•	•
144	•	•	•	•	•

Parameters are given as reference only.

Please contact a sales representative for specific inquiries. Other sizes and thicknesses, including light gauge jacket heads, are available upon application.